

Alpen Stone

Unlock the potential of your space with our Alpen Stone collection, where modern elegance meets unparalleled versatility. Perfect for both residential and commercial settings, this exquisite collection brings an air of sophistication to any environment, whether indoors or outdoors.

Available in six distinct formats – 75 x 300mm, 300 x 300mm, 300 x 600mm, 600 x 600mm, 600 x 1200mm, and 398 x 600mm coping – Alpen Stone is designed to enhance and elevate any area effortlessly. From rejuvenating entryways to revitalising patios, its easy installation ensures a swift and stunning transformation. Embrace the sleek charm of Alpen Stone and breathe new life into your spaces today, creating a haven of modernity and style.



ALPEN STONE






26 Daisy Street
Revesby NSW 2212
P 02 9772 2088
E sales@japanceramics.com.au
japanceramics.com.au

COLOURS



Beige Grey Smoke White

FORMATS


						
600 x 1200mm (12 faces)	600 x 600mm (24 faces)	600 x 600mm - 2CM (24 faces)	398 x 600mm - 2CM Bullnose (24 faces)	300 x 600mm (48 faces)	300 x 300mm (96 faces)	75 x 300mm (192 faces)

FINISH: **IN/OUT** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **TEXTURED** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **LAPPATO** | CATEGORY: PORCELAIN | EDGE DETAIL: RECTIFIED | V RATING: V3




Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.

Beige




600 x 600mm
ALPBE60 (in/out)
ALPBE60LP (lappato)
ALPBE60-20 (Textured 2CM)

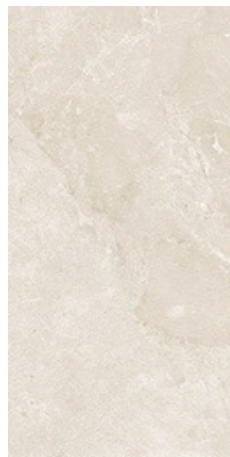


600 x 1200mm
ALPBE612 (in/out)
ALPBE612LP (lappato)




75 x 300mm
ALPBE7530 (in/out)



300 x 300mm
ALPBE30 (in/out)




398 x 600mm Coping
ALPBE46-20 (Textured)




300 x 600mm
ALPBE36 (in/out)
ALPBE36LP (lappato)

Grey




600 x 600mm
ALPGY60 (in/out)
ALPGY60T (Textured 2CM)
ALPGY60LP (lappato)

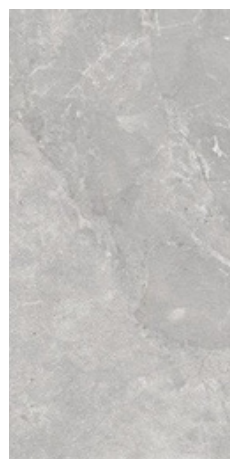


600 x 1200mm
ALGY612 (in/out)
ALGY612LP (lappato)



75 x 300mm
ALGY7530 (in/out)



300 x 300mm
ALGY30 (in/out)




398 x 600mm Coping
ALPGY46-20 (Textured)



300 x 600mm
ALGY36 (in/out)
ALGY36LP (lappato)



Smoke




600 x 600mm
ALPSM60 (in/out)
ALPSM60-20 (Textured 2CM)
ALPSM60LP (lappato)




75 x 300mm
ALPSM7530 (in/out)




300 x 300mm
ALPSM30 (in/out)



398 x 600mm Coping
ALPSM46-20 (Textured)




300 x 600mm
ALPSM36 (in/out)
ALPSM36LP (lappato)

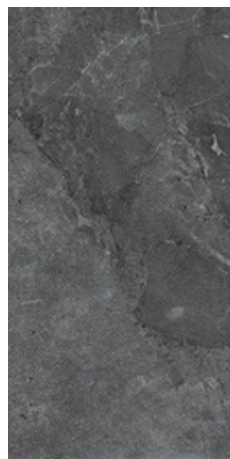

600 x 1200mm
ALPSM612 (in/out)
ALPSM612LP (lappato)




White



600 x 600mm
ALPWH60 (in/out)
ALPWH60T (Textured 2CM)
ALPWH60LP (lappato)




75 x 300mm
ALPWH7530 (in/out)




300 x 300mm
ALPWH30 (in/out)



398 x 600mm Coping
ALPWH46-20 (Textured)



300 x 600mm
ALPWH36 (in/out)
ALPWH36LP (lappato)

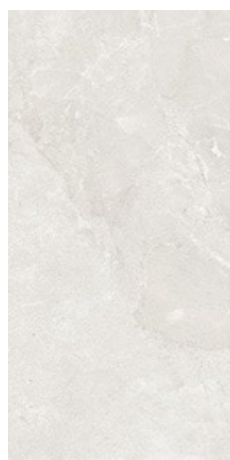

600 x 1200mm
ALPWH612 (in/out)
ALPWH612LP (lappato)

Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$	Full range
	Determination of dimensions	EN ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Transmutation $\pm 0.5\%$	Length and width $\pm 0.1\%$ Thickness $\pm 3\%$ Transmutation $\pm 0.2\%$	Full range
	Breaking strength	EN ISO 10545-4	$\geq 1300 \text{ N}$	$\geq 1300 \text{ N}$	Full range
	Modulus of rupture	EN ISO 10545-4	$\geq 35 \text{ N/mm}^2$	$\geq 35 \text{ N/mm}^2$	Full range
	Abrasion resistance	EN ISO 10545-7	$\leq 205 \text{ mm}^2$	$\leq 160 \text{ mm}^2$	Full range
	Slip resistance (wet pendulum test)	AS 4586-2013/ AMDT1-2017	N/A	P5 P4	Textured In/out
	Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
	Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V3	Full range

Packing Information

Tile description		Quantity per box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
75 x 300	In/out	36	44.44	22.22kg	58.32	72
300 x 300	In/out	11	11.11	22.00 kg	55.44	56
300 x 600	In/out Lappato	8	5.56	21.18 kg	57.60	40
398 x 600 Coping	In/out	2	4.19	46.88 kg	N/A	64
600 x 600	In/out Lappato	4	2.78	21.18 kg	57.60	40
600 x 600 2cm pavers	In/out	2	2.78	46.53 kg	28.80	40
600 x 1200	In/out Lappato	2	1.39	23.61 kg	57.60	40

The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.



Please note: Slip rating is indicative only.
Actual performance may vary depending on installation,
maintenance, cleaning, and environmental conditions.
Customers should ensure suitability for their specific
project requirements prior to installation.

Slip Check to AS 4586-2013

Alpen Stone

Report Number: R33536b

Report Date: 28 March 2025

Total Number of Pages 2

Safe Environments quality management system is certified
to ISO 9001:2015

Accredited for compliance with ISO/IEC 17025 – Testing

NATA is a signatory to the ILAC Mutual Recognition
Arrangement for the mutual recognition of the equivalence
of testing, medical testing, calibration, inspection, proficiency
testing scheme providers and reference materials producers
reports and certificates

Issued by

Safe Environments Pty Limited
6/7 Inglewood Place
Norwest NSW 2153

Prepared for

Japan Ceramics Pty Ltd
26 Daisy Street
Revesby NSW 2212

Approved by


Ratan Venkatesan
Authorised Signatory

28 March 2025

Test Report No. R33536b

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586-2013 Appendix A (Wet Pendulum Test)

The slip resistance classification has been determined for unused surfaces under specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface after classification. Standards Australia Handbook 198:2014 *Guide to the specification and testing of slip resistance of pedestrian surfaces* provides guidance for the selection of slip resistant pedestrian surfaces classified in accordance with AS 4586-2013. It is recommended that this test report be read in conjunction with AS 4586, HB 197 & HB 198.

Requested by: Japan Ceramics Pty Ltd
Client Address: 26 Daisy Street

Revesby NSW 2212
Product Manufacturer: Padua Ceramics
Product Description: Alpen Stone

Test conducted according to: AS 4586:2013 Appendix A
Sampling Procedures: Performed by client and tested as received.
Location: 6/7 Inglewood Place, Norwest NSW 2153

Conducted by: Nathan Vanderburg

Date:	28 March 2023	Temperature:	27°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	N/A		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	49	54	50	49	49

Reported SRV of Sample:	50
Class:	P4

The expanded uncertainty (U_{95}) at the 95% level of confidence with a coverage factor (k) of 2 has been estimated to be 3 BPN or 8 %, whichever is the greater; sampling uncertainty has not been included. The expanded uncertainty should be considered when interpreting results or assessing conformity. Results relate only to items tested.

Please note: Slip rating is indicative only.
Actual performance may vary depending on installation,
maintenance, cleaning, and environmental conditions.
Customers should ensure suitability for their specific
project requirements prior to installation.