

Aquitaine


Our Aquitaine range creates the look of travertine without its associated maintenance. Made in Italy, these glazed porcelain tiles are indistinguishable from the real product, easy to clean, require no sealing and offer superior performance. This versatile product is perfect for internal and external applications as well as wet areas. Available in three colourways (beige, grigio and silver), and two sizes of 408mm x 614mm and French Pattern.

AQUITAINE


COLOURS



Beige




Grigio




Silver

FORMATS

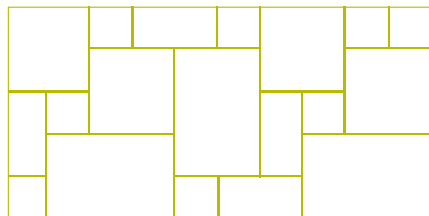

French Pattern




408 x 614mm

FINISH: **MATT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V4
FINISH: **EXTERNAL** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V4



Beige




408 x 614mm
 AQUBE46 (matt)P4
 AQUBE46E (textured)
 P5



French Pattern*
 AQUBFR (matt)P4
 AQUBFRE (textured) P5

Grigio



408 x 614mm
 AQUG46 (matt)P4
 AQUG46E (textured) P5



French Pattern*
 AQUGFR (matt)P4
 AQUGFRE (textured) P5

Silver



408 x 614mm
AQUSL46 (matt)P4
AQUSL46E (textured) P5



French Pattern*
AQUSLFR (matt) P4
AQUSLFRE (textured) P5

Technical Specification

	Properties	TestMethod	Required Value	Value	Applies to
	Water absorption	ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 0.5\%$	length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 0.5\%$	Full range
	Determination of dimensions	ISO 10545-4	≥ 1300 N	Complies with standards	Full range
	Breaking strength	ISO 10545-4	≥ 35 N/mm	4 0.75 N /m m	Full range
	Modulus of rupture	ISO 10545-4	≥ 35 N/mm	4 0.75 N /m m	Full range
	Abrasion resistance	ISO 10545-7		Class 4 (6000 rotations)	Full range
	Slip resistance (oil wet ramp test)	DIN 51130	N/A	R11 – Textured R9 – Natural	Natural, Textured
	Slip resistance (wet pendulum test)	Wet pendulum test	N/A	P4 – Matt P5 – Textured	Full range
	Chemical resistance	ISO 10545-13	Min. UB	Compliant	Full range
	Stain resistance	ISO 10545-14	Min class 3	Class 5	Full range
	Origin	N/A	N/A	Italy	Full range
	Shade variation	N/A	N/A	V2	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
408 x 614	Matt Textured	5	3.99	20.11 kg	3.99	48
French pattern	Matt Textured	6	8.00	20.11 kg	33.00	44



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian

Please note: Slip rating is indicative only. Actual performance may vary depending on installation, maintenance, cleaning, and environmental conditions. Customers should ensure suitability for their specific project requirements prior to installation.

Slip Check to AS 4586:2013

Aquitane - Internal

NATA Accreditation Number 17139

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

Accredited for compliance with ISO/IEC 17025

NATA is a signatory to the APLAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports

11 March 2016

Test Report No. R10474b

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586:2013 Appendix A (Wet Pendulum Test)

The slip resistance Classification has been determined for unused surfaces using specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface.


Requested by: Japan Ceramics
Client Address: 26 Daisy St
Revesby NSW 2212
Product Manufacturer: Coem Spa
Product Description: Aquitane - Internal

Test conducted according to: AS 4586:2013 Appendix A
Location: Slip Check Pty Ltd Test Facilities, Blacktown NSW 2148
Conducted by: Dale Rowell

Date:	10 March 2016	Temperature:	30°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	NA		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	44	48	48	48	46

Reported SRV of Sample:	47
Class:	P4



Martin Daniel
Materials Scientist

Please note: Slip rating is indicative only. Actual performance may vary depending on installation, maintenance, cleaning, and environmental conditions. Customers should ensure suitability for their specific project requirements prior to installation.

Slip Check to AS 4586:2013

Aquitane - External

NATA Accreditation Number 17139

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

Accredited for compliance with ISO/IEC 17025

NATA is a signatory to the APLAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports

11 March 2016

Test Report No. R10474c

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586:2013 Appendix A (Wet Pendulum Test)

The slip resistance Classification has been determined for unused surfaces using specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface.


Requested by: Japan Ceramics
Client Address: 26 Daisy St
Revesby NSW 2212
Product Manufacturer: Coem Spa
Product Description: Aquitane - External

Test conducted according to: AS 4586:2013 Appendix A
Location: Slip Check Pty Ltd Test Facilities, Blacktown NSW 2148
Conducted by: Dale Rowell

Date:	10 March 2016	Temperature:	30°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	NA		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	69	68	67	71	69

Reported SRV of Sample:	69
Class:	P5



Martin Daniel
Materials Scientist