

Lusso

Lusso is inspired by the natural beauty of stone. The range is created with an unique honed finish which offers the combination of stone and elegance without the maintenance. Available in five colourways – Grigio, Naturale, Nero, Terra and White – and sizes of 73 x 298mm, 300 x 300mm, 300 x 600mm, 600 x 600mm and 600 x 1200mm. The 600 x 600mm size has a P4 matt finish making Lusso suitable for internal and external applications, including wet areas.


COLOURS




Grigio




Naturale



Nero



Terra




White


FORMATS



600 x 1200mm
(6 faces)



600 x 600mm
(8 faces)



300 x 600mm
(16 faces)



300 x 300mm
(32 faces)



73 x 298mm
(128 faces)

FINISH: **HONED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3

FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3




Colour variation is an inherent property of all kiln-fired products. Tiles supplied may vary from samples provided. All slip ratings are provided subject to the guidelines outlined in our terms and conditions.


Grigio



73 x 298mm
LUSGY753H (honed)




300 x 300mm
LUSGY30H (honed)



300 x 600mm
LUSGY36H (honed)



600 x 600mm
LUSGY60H (honed)
LUSGY60M (in/out) P4

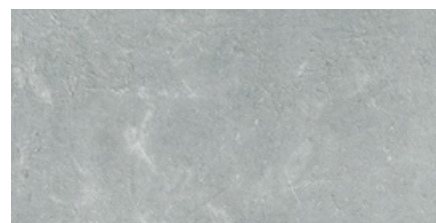


600 x 1200mm
LUSGY612H (honed)


Naturale




73 x 298mm
LUSNAT753H (honed)




300 x 300mm
LUSNAT30H (honed)



300 x 600mm
LUSNAT36H (honed)



600 x 600mm
LUSNAT60H (honed)
LUSNAT60M (in/out) P4

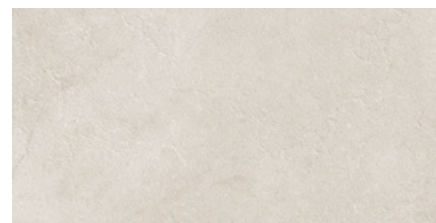


600 x 1200mm
LUSNAT612H (honed)


Nero




73 x 298mm
LUSGY753H (honed)




300 x 300mm
LUSNER30H (honed)



300 x 600mm
LUSNER36H (honed)



600 x 600mm
LUSNER60H (honed)
LUSNER60M (in/out) P4

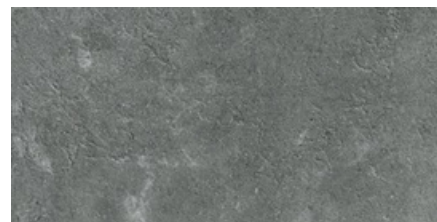


600 x 1200mm
LUSNER612H (honed)


Terra



73 x 298mm
LUSTER753H (honed)




300 x 300mm
LUSTER30H (honed)



300 x 600mm
LUSTER36H (honed)



600 x 600mm
LUSTER60H (honed)
LUSTER60M (in/out) P4

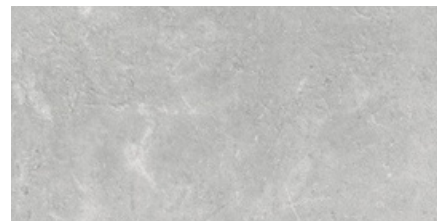

600 x 1200mm
LUSTER612H (honed)

White



73 x 298mm
52869 (honed)

300 x 300mm
52865 (honed)

300 x 600mm
52866 (honed)

600 x 600mm
52868 (honed)
52938 (in/out) P4

600 x 1200mm
53269 (honed)



Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	ASTM C373	$\leq 0.5\%$	$\leq 0.11\%$	Full range
	Breaking strength	ASTM C648	≥ 1100 N	≥ 2143 N	Full range
	Abrasion resistance	ASTM C1027	As reported	Class 3	Full range
	Slip resistance (oil wet ramp test)	AS 4586:2013	N/A	N/A	Full range
	Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P4 - In/out	Full range
	Chemical resistance	ASTM C650	As reported	Class A	Full range
	Stain resistance	ASTM C1378	As reported	Class A	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V3	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
73 x 298	Honed	40	44.44	18.00 kg	40.50	45
300 x 300	Honed	11	11.11	22.22 kg	55.44	56
300 x 600	Honed	8	5.56	22.22 kg	57.60	40
600 x 600	Honed, In/out	4	2.78	22.22 kg	57.60	40
600 x 1200	Honed	2	1.39	25.69 kg	40.32	28



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Please note: Slip rating is indicative only. Actual performance may vary depending on installation, maintenance, cleaning, and environmental conditions. Customers should ensure suitability for their specific project requirements prior to installation.

Slip Check to AS 4586-2013

Lusso IN/OUT

Report Number: R22211

Report Date: 22 October 2020

Total Number of Pages 2

Accredited for compliance with ISO/IEC 17025 – Testing

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports

Issued by

Safe Environments Pty Ltd
Unit 4, 40 Bessemer Street
Blacktown NSW 2148

Prepared for

Japan Ceramics
26 Daisy Street
Revesby NSW 2212

Approved by



Dale Rowell
Authorised Signatory

22 October 2020

Test Report No. R22211

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586-2013 Appendix A (Wet Pendulum Test)

The slip resistance classification has been determined for unused surfaces using specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface after classification. Standards Australia Handbook 198:2014 *Guide to the specification and testing of slip resistance of pedestrian surfaces* provides guidance for the selection of slip resistant pedestrian surfaces classified in accordance with AS 4586-2013. It is recommended that this test report be read in conjunction with AS 4586 and HB 198.

Requested by: Japan Ceramics
Client Address: 26 Daisy Street
Revesby NSW 2212
Product Manufacturer: Max Glory
Product Description: Lusso IN/OUT

Test conducted according to: AS 4586:2013 Appendix A
Location: 4/40 Bessemer Street, Blacktown NSW 2148
Conducted by: Oshi Barkat

Date:	22 October 2020	Temperature:	21°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	NA		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	61	64	64	60	62

Reported SRV of Sample:	62
Class:	P5