

Renegade

The Renegade range is an Australian-made glazed tile series using the latest in digital technology. Designed to offer flexibility for both residential and commercial use, the range is suitable for wall and floor applications. Available in six colourways each with sizes of 300 x 300mm and 300 x 600mm in a matt finish as well as sizes of 450mm x 450mm and 600 x 600mm in both matt and textured finishes.



RENEGADE

COLOURS, FORMATS & FINISHES

						
Matt P3	White	Beige	Latte	Grey	Ash	Black
600 x 600mm	•	•	•	•	•	
450 x 450mm	•	•	•	•	•	•
300 x 600mm	•	•	•	•	•	
300 x 300mm	•	•	•	•	•	•
Textured P5						
600 x 600mm	•	•	•	•	•	
450 x 450mm	•	•	•	•	•	•

FINISH: **MATT** | CATEGORY: GLAZED FLOOR TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V2
FINISH: **TEXTURED** | CATEGORY: GLAZED FLOOR TILES | EDGE DETAIL: UNRECTIFIED | V RATING: V2






White




300 x 300mm
RENW30 (matt)



300 x 600mm
RENW36 (matt)




450 x 450mm
RENW45 (matt)
RENW45T (textured)




600 x 600mm
RENW60 (matt)
RENW60T (textured)




Beige




300 x 300mm
RENBE30 (matt)



300 x 600mm
RENBE36 (matt)



450 x 450mm
RENBE45 (matt)
RENBE45T (textured)




600 x 600mm
RENBE60 (matt)
RENBE60T (textured)




Latte




V2
P3 P5




300 x 300mm
RENLA30 (matt)



300 x 600mm
RENLA36 (matt)



450 x 450mm
RENLA45 (matt)
RENLA45T (textured)




600 x 600mm
RENLA60 (matt)
RENLA60T (textured)


Grey




V2
P3 P5




300 x 300mm
RENGY30 (matt)



300 x 600mm
RENGY36 (matt)



450 x 450mm
RENGY45 (matt)
RENGY45T (textured)




600 x 600mm
RENGY60 (matt)
RENGY60T (textured)


Ash




V2
P3 P5




300 x 300mm
RENAS30 (matt)



300 x 600mm
RENAS36 (matt)




450 x 450mm
RENAS45 (matt)
RENAS45T (textured)




600 x 600mm
RENAS60 (matt)
RENAS60T (textured)


Black

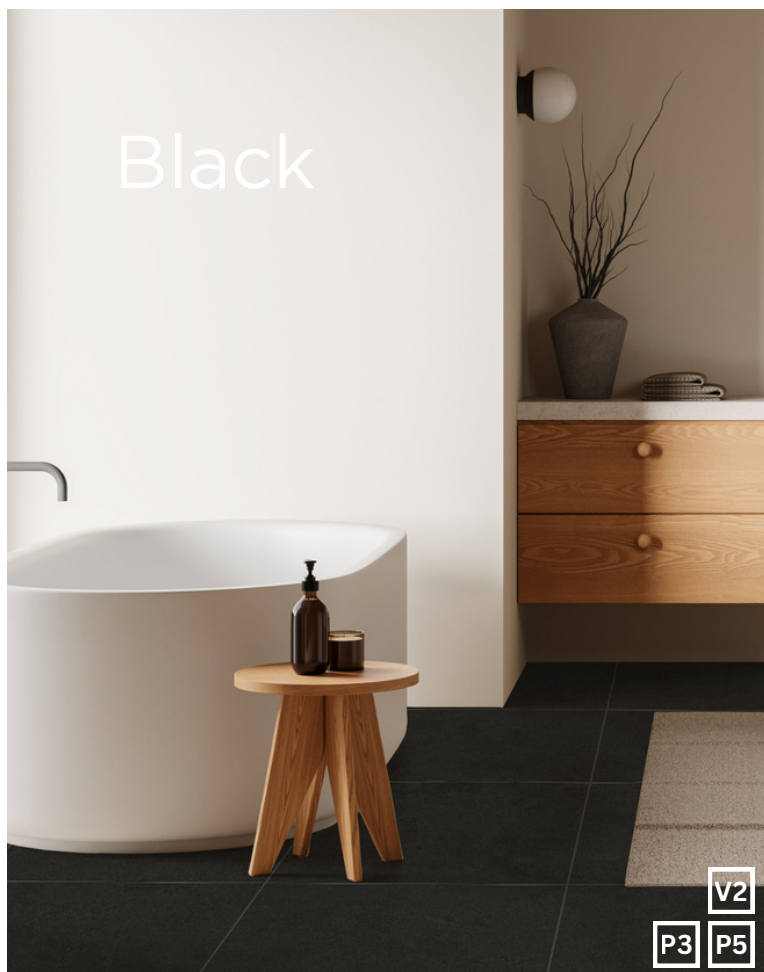

V2
P3 P5



300 x 300mm
RENBK30 (matt)



450 x 450mm
RENBK45 (matt)
RENBK45T (textured)

Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 3\%$	All finishes
 Determination of dimensions	ISO 10545-2	Length and width $\pm 0.5\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 5\%$	Length and width $\pm 0.5\%$ Thickness $\pm 5.0\%$ Edge straightness $\pm 0.6\%$ Surface flatness $\pm 0.5\%$	All finishes
 Breaking strength	ISO 10545-4	≥ 12 N/mm	30 N/mm	All finishes
 Abrasion resistance	ISO 10545-6	Class 3 min	Complies with standards	All finishes
 Slip resistance (wet pendulum test)	Wet pendulum test	N/A	P3 – Matt P5 – Textured	Matt, Textured
 Chemical resistance	ISO 10545-13	GB min.	Complies with standards	All finishes
 Stain resistance	ISO 10545-14	Class 3 min.	Complies with standards	All finishes
 Origin	N/A	N/A	Australia	Full range
 Shade variation	N/A	N/A	V2	Full range



Packing Information


Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
300 x 300	Matt	22	11.11	14.05kg	95.04	48
300 x 600	Matt	8	5.56	20.00kg	69.12	48
450 x 450	Matt Textured	7	4.93	16.74kg	113.60	80
600 x 600	Matt Textured	4	2.78	19.97kg	69.12	48



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.




White




300 x 300mm
RENW30 (matt) P3



300 x 600mm
RENW36 (matt) P3




450 x 450mm
RENW45 (matt) P3
RENW45T (textured) P5




600 x 600mm
RENW60 (matt) P3
RENW60T (textured) P5




Beige




300 x 300mm
RENBE30 (matt) P3



300 x 600mm
RENBE36 (matt) P3




450 x 450mm
RENBE45 (matt) P3
RENBE45T (textured) P5




600 x 600mm
RENBE60 (matt) P3
RENBE60T (textured) P5


Ash




300 x 300mm
RENAS30 (matt) P3



300 x 600mm
RENAS36 (matt) P3




450 x 450mm
RENAS45 (matt) P3
RENAS45T (textured) P5




600 x 600mm
RENAS60 (matt) P3
RENAS60T (textured) P5

Black




300 x 300mm
RENBK30 (matt) P3




450 x 450mm
RENBK45 (matt) P3
RENBK45T (textured) P5




Latte




300 x 300mm
RENLA30 (matt) P3



300 x 600mm
RENLA36 (matt) P3




450 x 450mm
RENLA45 (matt) P3
RENLA45T (textured) P5




600 x 600mm
RENLA60 (matt) P3
RENLA60T (textured) P5




Grey




300 x 300mm
RENGY30 (matt) P3



300 x 600mm
RENGY36 (matt) P3



450 x 450mm
RENGY45 (matt) P3
RENGY45T (textured) P5



600 x 600mm
RENGY60 (matt) P3
RENGY60T (textured) P5

Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 3\%$	All finishes
	Determination of dimensions	ISO 10545-2	Length and width $\pm 0.5\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 5\%$	Length and width 0.5% Thickness 5.0% Edge straightness 0.6% Surface flatness 0.5%	All finishes
	Modulus of rupture	ISO 10545-4	≥ 12 N/mm	30 N/mm	All finishes
	Abrasion resistance	ISO 10545-6	Class 3 min	Complies with standards	All finishes
	Slip resistance (wet pendulum test)	Wet pendulum test	N/A	P3 – Matt P5 – Textured	Matt, Textured
	Chemical resistance	ISO 10545-13	GB min.	Complies with standards	All finishes
	Stain resistance	ISO 10545-14	Class 3 min.	Complies with standards	All finishes
	Origin	N/A	N/A	Australia	Full range
	Shade variation	N/A	N/A	V2	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 300	Matt	22	11.11	14.05 kg	95.04	48
300 x 600	Matt	8	5.56	20.00 kg	69.12	48
450 x 450	Matt Textured	7	4.93	16.74 kg	113.60	80
600 x 600	Matt Textured	4	2.78	19.97 kg	69.12	48



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Slip ratings are indicative only.
Actual performance may vary
depending on installation, surface
conditions, and maintenance.

Slip Test Report – Batch Certification

National Ceramic Industries Australia Pty Ltd, ABN: 83 100 467 267

175 Racecourse Rd, Rutherford NSW 2320, Australia, Tel: +61 2 4931 8400 Fax: +61 2 4931 8499, www.ncia.com.au

Slip Resistance Classification of New Pedestrian Surfaces Materials Australia Standard AS 4586:2013 Appendix A (Wet Pendulum Test Method)

Production Year	2025	Test Sheet No:	Batch Test	Issue Date	27/08/2025	
Testing was conducted using a 96 rubber slider in accordance with the above Standard. Slider was prepared/conducted using P400C paper and 3 µm lapping film						
Code/s	Tile Name/s	Tile Size (cm)	Test Location	Cleaning Pre-testing	Results	Classification of Pedestrian Surfaces Materials according to the above Standard
BRN61045A	Renegade White	45X45	Tile Surface	Water & Scrubbing	Recorded	P3
BRN62045A	Renegade Grey	45X45	Tile Surface	Water & Scrubbing	Recorded	
BRN62245A	Renegade Ash	45X45	Tile Surface	Water & Scrubbing	Recorded	
BRN63145A	Renegade Beige	45X45	Tile Surface	Water & Scrubbing	Recorded	
BRN64145A	Renegade Latte	45X45	Tile Surface	Water & Scrubbing	Recorded	
BRN68045A	Renegade Black	45X45	Tile Surface	Water & Scrubbing	Recorded	
Temperature (indoor)	20.8°C					
Testing Instrument	Pendulum Friction Tester, Calibration Date: 24 June 2024			National Ceramic Industries Australia Pty Ltd		
Reporting Officer	Hong Lu			NCIA Tiles Testing Laboratory		

Slip ratings are indicative only. Actual performance may vary depending on installation, surface conditions, and maintenance.

Slip Test Report – Batch Certification

National Ceramic Industries Australia Pty Ltd, ABN: 83 100 467 267

175 Racecourse Rd, Rutherford NSW 2320, Australia, Tel: +61 2 4931 8400 Fax: +61 2 4931 8499, www.ncia.com.au

Slip Resistance Classification of New Pedestrian Surfaces Materials Australia Standard AS 4586:2013 Appendix A (Wet Pendulum Test Method)

Production Year	2025	Test Sheet No:	Batch Test	Issue Date	27/08/2025	
Testing was conducted using a 96 rubber slider in accordance with the above Standard. Slider was prepared/conducted using P400C paper and 3 µm lapping film						
Code/s	Tile Name/s	Tile Size (cm)	Test Location	Cleaning Pre-testing	Results	Classification of Pedestrian Surfaces Materials according to the above Standard
BRN61055A	Renegade White	30X60	Tile Surface	Water & Scrubbing	Recorded	P3
BRN62055A	Renegade Grey	30X60	Tile Surface	Water & Scrubbing	Recorded	
BRN62255A	Renegade Ash	30X60	Tile Surface	Water & Scrubbing	Recorded	
BRN63155A	Renegade Beige	30X60	Tile Surface	Water & Scrubbing	Recorded	
BRN64155A	Renegade Latte	30X60	Tile Surface	Water & Scrubbing	Recorded	
BRN61060A	Renegade White	60X60	Tile Surface	Water & Scrubbing	Recorded	
BRN62060A	Renegade Grey	60X60	Tile Surface	Water & Scrubbing	Recorded	
BRN62260A	Renegade Ash	60X60	Tile Surface	Water & Scrubbing	Recorded	
BRN63160A	Renegade Beige	60X60	Tile Surface	Water & Scrubbing	Recorded	
BRN64160A	Renegade Latte	60X60	Tile Surface	Water & Scrubbing	Recorded	
Temperature (indoor)	20.8°C					
Testing Instrument	Pendulum Friction Tester, Calibration Date: 24 June 2024			National Ceramic Industries Australia Pty Ltd		
Reporting Officer	Hong Lu			NCIA Tiles Testing Laboratory		

RENEGADE EXTERNAL

BPN P5 slip resistance

Glazed Porcelain - Slip Resistant Finish 450x450



WET PENDULUM TEST

SLIP RESISTANCE REPORT

AS 4586-2013

CLASSIFICATION OF PEDESTRIAN SURFACE MATERIALS ACCORDING
TO
AS 4586 - 2013 WET PENDULUM TEST

Class	Slider 96 (4S)	Slider 55	Old Class
P5	>54	>44	V
P4	45-54	40-44	W
P3	35-44	35-39	X
P2	25-34	20-34	Y
P1	12 - 24	<20	Z
P0	<12		Z



NATIONAL CERAMIC INDUSTRIES AUSTRALIA

Slip ratings are indicative only. Actual performance may vary depending on installation, surface conditions, and maintenance.

175 Racecourse Road, Rutherford, NSW, 2320.