

Reverso

Reverso is an Italian glazed porcelain tile inspired by the beauty of vein cut travertine. Identical to the natural product, this range requires no sealing, does not stain and offers superior performance. Designed for easy-living lifestyles, Reverso is suitable for internal and external floors, including wet areas. This timeless series is available in six colourways, in two different sizes and an external finish.



REVERSO




26 Daisy Street
Revesby NSW 2212
P 02 9772 2088
E sales@japanceramics.com.au
japanceramics.com.au

COLOURS




Avorio




Beige




Black



Grigio



Silver




White

FORMATS



600 x 1200mm
(10 Faces)



300 x 600mm
(20 Faces)

FINISH: **MATT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3

FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3



Avorio



300 x 600mm
REVAV36 (matt) P2

Beige




300 x 600mm
REVB36 (matt) P2

Black



300 x 600mm
REVBK36 (matt) P2

Grigio



300 x 600mm
REVGY36 (matt) P2




Silver




300 x 600mm
REVSIL36 (matt) P2



White



300 x 600mm
REVWH36 (matt) P2

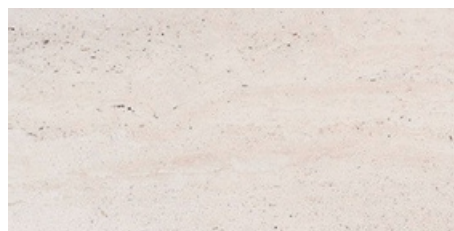

600 x 1200mm
REVWH612 (matt)P2
REVWH612T (textured) P5

Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	ISO 10545-3	$\leq 0.5\%$	0.03%	Full range
	Determination of dimensions	ISO 10545-2	Length and width 0.6% Thickness 0.5% Edge straightness 0.5% Surface flatness 0.5%	Complies with standards	Full range
	Breaking strength	ISO 10545-4	≥ 1300 N	Complies with standards	Full range
	Modulus of rupture	ISO 10545-4	≥ 35 N/mm	48.4N/mm	Full range
	Abrasion resistance	ISO 10545-6	≤ 175 mm ³	150mm ³	Full range
	Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P5 - Textured P2 - Natural	Full range
	Chemical resistance	ISO 10545-13	Minimum UB	ULA class	Full range
	Origin	N/A	N/A	Italy	Full range
	Shade variation	N/A	N/A	V3	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 600	Matt	6	5.56	20.10 kg	43.20	40
600 x 1200	Matt Textured	2	1.39	22.43 kg	50.40	35



The data and information contained in these specification sheets are indicative only unless stated otherwise.
As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation.
The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.
To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.
No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Please note: Slip rating is indicative only. Actual performance may vary depending on installation, maintenance, cleaning, and environmental conditions. Customers should ensure suitability for their specific project requirements prior to installation.

Slip Check to AS 4586:2013

Reverso Matt 30 x 30

NATA Accreditation Number 17139

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

Accredited for compliance with ISO/IEC 17025

NATA is a signatory to the APLAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports

27 April 2016

Test Report No. R10776a

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586:2013 Appendix A (Wet Pendulum Test)

The slip resistance Classification has been determined for unused surfaces using specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface.

Requested by: Japan Ceramics Pty Ltd
Client Address: 26 Daisy Street

Revesby NSW 2212

Product Manufacturer: Coem Spa
Product Description: Reverso Matt 30 x 30

Test conducted according to: AS 4586:2013 Appendix A
Location: Slip Check Pty Ltd Test Facilities, Blacktown NSW 2148
Conducted by: Dale Rowell

Date:	26 April 2016	Temperature:	22°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	NA		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	28	28	28	27	25

Reported SRV of Sample:	27
Class:	P2



Ryan Voorderhake
Technician