

Touchstone

The Touchstone collection features the elegance of natural marble and harmonious balance of veining and shading. With its tone-on-tone colour variations and both Polished Matt and External Outdoor finishes, it creates a soft-to-the-touch feel with 3D printing technology which provides the perfect balance between luxury and understated unassuming beauty. Perfect for any floor or wall, this timeless collection will be sure to bring a sense of style to your home for years to come. With two finish versions, you'll have no problem finding the perfect one for your space.

COLOURS, FORMATS & FINISHES



Matt

White

Grey

600 x 1200mm	●	●
600 x 600mm	●	●

Polished Matt

600 x 1200mm	●	●
--------------	---	---

Textured

600 x 1200mm	●	●
--------------	---	---


FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **POLISHED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3
FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3




White



V3
P4 P5



600 x 600mm
TOUWH60 (matt)

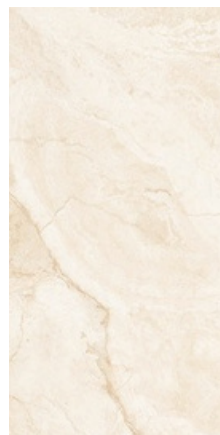


600 x 1200mm
TOUWH612 (matt)
TOUWH612P (polished matt)
TOUWH612E (textured)


Grey



V3
P4 P5



600 x 600mm
TOUGY60 (matt)

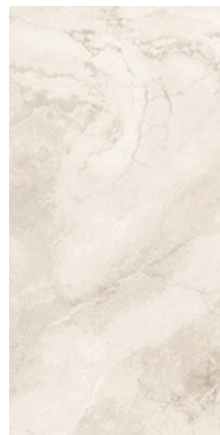

600 x 1200mm
TOUGY612 (matt)
TOUGY612P (polished matt)
TOUGY612E (textured)

Technical Specifications

Properties	Test Method	Required Value	Value	Applies to
 Water absorption	ISO 10545-3	$\leq 0.5\%$	0.5%	Full range
 Determination of dimensions	ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Edge straightness $\pm 0.5\%$ Surface flatness $\pm 0.5\%$	Compliant	Full range
 Breaking strength	ISO 10545-4	1300 N min.	Compliant	Full range
 Abrasion resistance	ISO 10545-6	175 mm ³ max.	Compliant	Full range
 Slip resistance (oil wet ramp test)	DIN 51130	N/A	R10	600 x 1200 Matt
 Chemical resistance	ISO 10545-13	min. UB	Compliant	Full range
 Origin	N/A	N/A	Italy	Full range
 Shade variation	N/A	N/A	V3	600 x 1200



Packing Information

Tile Description		Quantity per Box	Quantity per m2		Quantity per Pallet	
Size (mm)	Finish	Pieces	Pieces	Weight	m2	Boxes
600 x 600	Matt	4	2.78	30.50kg	43.20	30
600 x 1200	Polished Matt Matt Textured	2	1.39	30.50kg	51.84	36



The data and information contained in these specification sheets are indicative only unless stated otherwise. As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation. The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. To the maximum extent permitted by law, ColorTile will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet. No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Slip ratings are indicative only. Actual performance may vary depending on installation, surface conditions, and maintenance.

Slip Check to AS 4586-2013 Touchstone 600x1200 External

Report Number: R29164c

Report Date: 12 July 2023

Total Number of Pages 2

Accredited for compliance with ISO/IEC 17025 – Testing

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration, inspection, proficiency testing scheme providers and reference materials producers reports and certificates

Issued by

Safe Environments Pty Limited
Unit 4, 40 Bessemer Street
Blacktown NSW 2148

Prepared for

Japan Ceramics
26 Daisy Street
Revesby NSW 2212

Approved by



Nasser Cura
Authorised Signatory

12 July 2023

Test Report No. R29164c

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586-2013 Appendix A (Wet Pendulum Test)

The slip resistance classification has been determined for unused surfaces under specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface after classification. Standards Australia Handbook 198:2014 *Guide to the specification and testing of slip resistance of pedestrian surfaces* provides guidance for the selection of slip resistant pedestrian surfaces classified in accordance with AS 4586-2013. It is recommended that this test report be read in conjunction with AS 4586, HB 197 & HB 198.

Requested by: Japan Ceramics
Client Address: 26 Daisy Street
Revesby NSW 2212
Product Manufacturer: COEM SPA
Product Description: Touchstone 600x1200 External

Test conducted according to: AS 4586:2013 Appendix A
Sampling Procedures: Performed by client and tested as received.
Location: 4/40 Bessemer Street, Blacktown NSW 2148
Conducted by: Keelia Kelly

Date: 12 July 2023
Sample: Unfixed
Rubber slider used: Slider 96
Slope of specimen: Tested on a flat level surface
Direction of Test: NA

Temperature: 16°C
Cleaning: None
Conditioned: Grade P 400 paper dry followed by wet lapping film

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	47	45	44	47	44

Reported SRV of Sample:	45
Class:	P4

The expanded uncertainty (U_{95}) at the 95% level of confidence with a coverage factor (k) of 2 has been estimated to be 3 BPN or 8 %, whichever is the greater; sampling uncertainty has not been included. The expanded uncertainty should be considered when interpreting results or assessing conformity. Results relate only to items tested.