


Venistone

Venistone combines the opulent and intricate elegance of stone with the durability of a porcelain tile. The range is available in five colourways – White, Cream, Light Grey, Dark Grey and Charcoal – and in formats 300 x 300mm, 300 x 600mm, 600 x 600mm as well as the contemporary format 600 x 1200mm. Suitable for internal and external applications, as well as walls, floors and wet areas, Venistone brings a contemporary and rich design element to its space.



COLOURS




Charcoal




Cream



Dark Grey




Light Grey




White

FORMATS




600 x 1200mm
(12 faces)



600 x 600mm
(24 faces)



600 x 600mm -
2CM (24 faces)




300 x 600mm
(48 faces)

FINISH: **IN/OUT** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3

FINISH: **TEXTURED** | CATEGORY: PORCELAIN TILES | EDGE DETAIL: RECTIFIED | V RATING: V3



Charcoal



300 x 300mm (48 faces)
VEISTCH30 (in/out) P4



300 x 600mm (24 faces)
VEISTCH36 (in/out) P4





600 x 600mm (12 faces)
VEISTCH60 (in/out) P4




600 x 1200mm (6 faces)
VEISTCH612 (in/out) P4


Cream

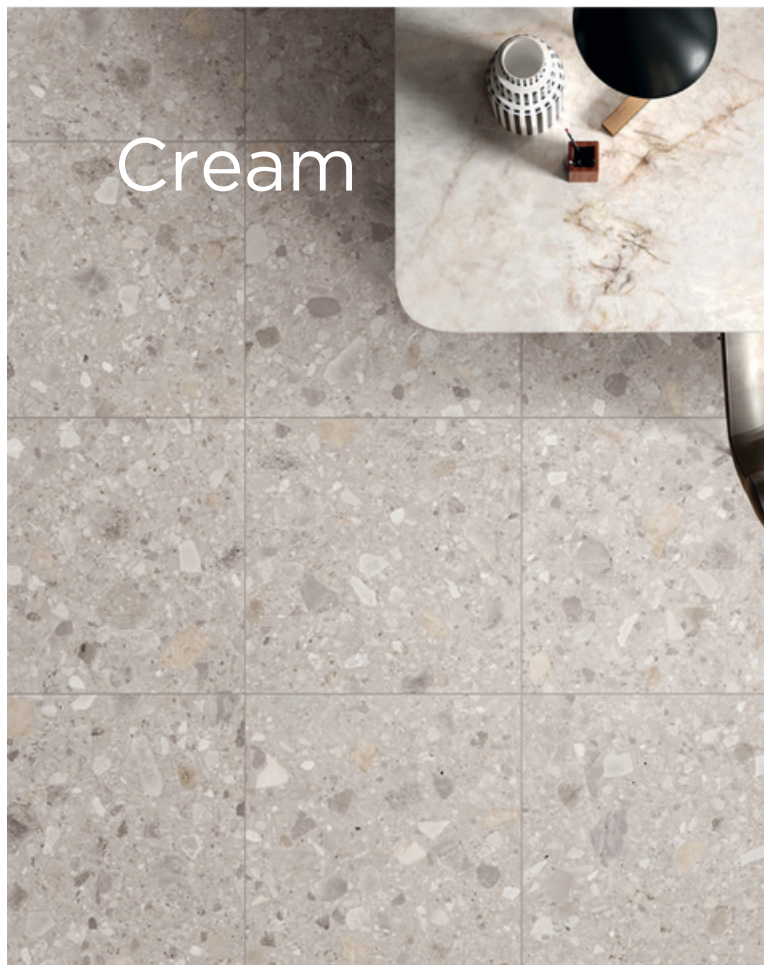

300 x 300mm (48 faces)
VEISTCR60 (in/out) P4



300 x 600mm (24 faces)
VEISTCR36 (in/out) P4




600 x 600mm (12 faces)
VEISTCR60 (in/out)
P4



600 x 1200mm (6 faces)
VEISTCH612 (in/out) P4



Dark Grey



300 x 300mm (48 faces)
VEISTDG30 (in/out) P4



300 x 600mm (24 faces)
VEISTDG36 (in/out) P4




600 x 600mm (12 faces)
VEISTDG60 (in/out) P4




600 x 1200mm (6 faces)
VEISTDG612 (in/out) P4




Light Grey



300 x 300mm (48 faces)
VEISTLG30 (in/out) P4



300 x 600mm (24 faces)
VEISTLG36 (in/out) P4




600 x 600mm (12 faces)
VEISTLG60 (in/out) P4



600 x 1200mm (6 faces)
VEISTLG612 (in/out) P4


White



300 x 300mm (48 faces)
VEISTWH30 (in/out) P4



300 x 600mm (24 faces)
VEISTWH36 (in/out) P4



600 x 600mm (12 faces)
VEISTWH60 (in/out) P4



600 x 1200mm (6 faces)
VEISTWH612 (in/out) P4



Technical Specification

	Properties	Test Method	Required Value	Value	Applies to
	Water absorption	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.5\%$	Full range
	Determination of dimensions	EN ISO 10545-2	Length and width $\pm 0.6\%$ Thickness $\pm 5.00\%$ Transmutation $\pm 0.5\%$	Length and width $\pm 0.1\%$ Thickness $\pm 3\%$ Transmutation $\pm 0.2\%$	Full range
	Breaking strength	EN ISO 10545-4	≥ 1300 N	≥ 1300 N	Full range
	Modulus of rupture	EN ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²	Full range
	Abrasion resistance	EN ISO 10545-7	≤ 205 mm ²	≤ 160 mm ²	Full range
	Slip resistance (wet pendulum test)	AS 4586:2013	N/A	P4	Full range
	Chemical resistance	EN ISO 10545-13	Min. GB	Pass	Full range
	Stain resistance	ISO 10545-14	Min class 3	Pass	Full range
	Origin	N/A	N/A	China	Full range
	Shade variation	N/A	N/A	V2	Full range

Packing Information

Tile description		Quantityper box	Quantity per m2		Quantity per pallet	
Size (mm)	Texture	Pieces	Pieces	Weight	m2	boxes
300 x 300	In/Out	11	11.11	22.22	53.46	54
300 x 600	In/Out	8	5.56	21.52	57.60	40
600 x 600	In/Out	4	2.78	21.52	57.60	40
600 x 1200	In/Out	2	1.39	23.26	40.32	28



The data and information contained in these specification sheets are indicative only unless stated otherwise.
As Japan Ceramics cannot control the conditions under which these products are manufactured, the specifications supplied should be considered as suggested guidelines only and are subject to batch variation.
The information contained in these specification sheets should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose.
To the maximum extent permitted by law, Japan Ceramics will not be responsible for damages of any nature resulting from the use or reliance upon the information contained in this data sheet.
No express or implied warranties are given in respect of any specification provided herein other than those that cannot be excluded under the Australian Consumer Law.

Please note: Slip rating is indicative only. Actual performance may vary depending on installation, maintenance, cleaning, and environmental conditions. Customers should ensure suitability for their specific project requirements prior to installation.

Slip Check to AS 4586-2013 Venistone In/Out

Report Number: R32007

Report Date: 3 September 2024

Total Number of Pages 2

Safe Environments quality management system is certified to ISO 9001:2015

Accredited for compliance with ISO/IEC 17025 – Testing

NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration, inspection, proficiency testing scheme providers and reference materials producers reports and certificates

Issued by

Safe Environments Pty Limited
6/7 Inglewood Place
Norwest NSW 2153

Prepared for

Japan Ceramics
26 Daisy Street
Revesby NSW 2212

Approved by


Ratan Venkatesan
Authorised Signatory

3 September 2024

Test Report No. R32007

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586-2013 Appendix A (Wet Pendulum Test)

The slip resistance classification has been determined for unused surfaces under specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface after classification. Standards Australia Handbook 198:2014 *Guide to the specification and testing of slip resistance of pedestrian surfaces* provides guidance for the selection of slip resistant pedestrian surfaces classified in accordance with AS 4586-2013. It is recommended that this test report be read in conjunction with AS 4586, HB 197 & HB 198.

Requested by: Japan Ceramics
Client Address: 26 Daisy Street
Revesby NSW 2212
Product Manufacturer: Foshan Padua
Product Description: Venistone In/Out

Test conducted according to: AS 4586:2013 Appendix A
Sampling Procedures: Performed by client and tested as received.
Location: 6/7 Inglewood Place, Norwest NSW 2153

Conducted by: Danish Raza

Date:	03 September 2024	Temperature:	20°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	N/A		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	52	54	47	48	50

Reported SRV of Sample:	50
Class:	P4

The expanded uncertainty (U_{95}) at the 95% level of confidence with a coverage factor (k) of 2 has been estimated to be 3 BPN or 8 %, whichever is the greater; sampling uncertainty has not been included. The expanded uncertainty should be considered when interpreting results or assessing conformity. Results relate only to items tested.